



**WELDING**

**WELDING  
MASK**

**AS-RT**

### FEATURES


- Wide viewing area 100x60
- 4 Trigger sensors (photoelectric) that are activated by outer light .
- Double range of different sensitivity, for low intensity TIG and high intensity MIG work.
- Auto diagnosis
- Low battery indicator.

### ADVANTAGES

- Degree of protection EN169 adjustable from Din 9 to Din 13
- High resistance polymer mask.
- Solar power cell.
- Ready for grinding.

FILTER

1. Degree of Protection Selector: 9-13 / 5-9 / GRINDING (Protects from grinding without darkening).
2. Delay setting (MIN-MAX).
3. Low battery indicator.
4. Shadow selector.
5. RESET button.
6. Sensitivity adjustment (LO-HI).

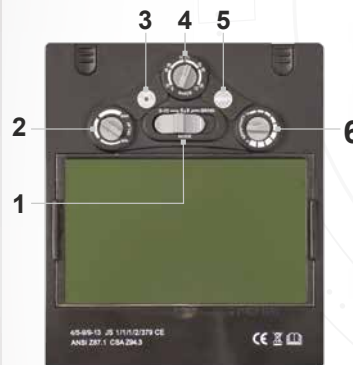

DATA SHEET

Filter dimension	110x90 mm.
Viewing area	92x35 mm.
Protection degree clear state	4 DIN.
Degree of protection dark state	9/13 DIN.
UV / IR protection	15 DIN.
Time from light to dark	1/20.000 s.
Time from dark to light	0
Sensitivity	Min-Max
Use temperature	-5°-55° °C.
Weight	500 gr.
Filter safe wear time	2 años

**READY FOR  
GRINDING**

89/686/CEE

**HIGH QUALITY  
PRODUCT**

EN379 - EN175



PROFESSIONAL QUALITY  
[www.stayer.es](http://www.stayer.es)