


Robust and compact for all application in road construction



indicator for straight cutting

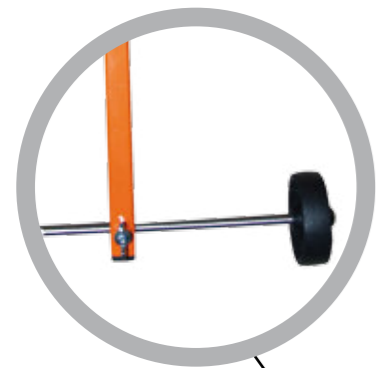


water tank 30 liter



handle bars adjustable for ergonomic working position



water cooling through the blade shaft

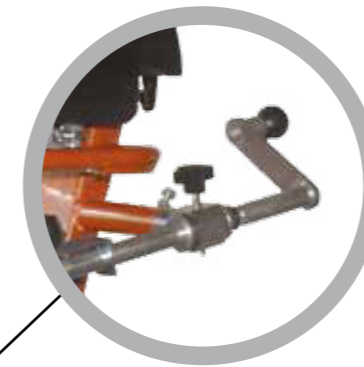

cutting depth adjustment by hand crank



fixing break



big wheels for easy moving on construction site



Technical data - Information

- cutting depth adjustment by hand crank
- cutting depth indicator
- pluggable blade guard
- pluggable water tank
- fixing break
- water cooling through the blade shaft
- handle bars adjustable for ergonomic working position
- incl. tool set
- compact design

Technical data:	GÖLZ FS17
Motor:	Honda GX390; 8,7kW / 13 HP
Max. cutting depth:	170 mm
Max. blade size-Ø/Arbor hole:	450 mm x 25,4 mm
Feed:	manual
Water tank:	30 liter
Cutting depth adjustment:	hand crank
V-belt tensioning:	manual
Cutting depth indicator:	yes
Dimension (LxWxH):	1010x570x1090 mm
Weight:	110 kg